

Retaining Straps

**Fasteners Stainless Steel,
Strap Plastic, Adjustable Length**

SPECIFICATION

Types

- Type **AA**: 2 flat screw-on plates
- Type **AD**: Flat screw-on plate, suspension plate and screw-on hook
- Type **BB**: 2 45° screw-on plates
- Type **BD**: 45° screw-on plate, suspension plate and screw-on hook

Fasteners

Stainless steel AISI 304 **NI**

Strap

Plastic, polyester

- Woven
- Black **B**

INFORMATION


Retaining straps GN 1113 can be adjusted to any length by means of the bar buckle. When used as a holding strap, they limit the opening angle of doors and covers or serve as bracing or a carry strap.

Thanks to the fasteners permanently sewn onto the ends, the retaining straps can be securely screwed or riveted in place. Types AD and BD can be quickly and easily attached or detached thanks to the additional hook latch.

Retaining straps GN 1113 may not be used for lifting loads or for lashing.

TECHNICAL INFORMATION


- Application Examples (see page)
- Plastic Characteristics (see page A2)
- Stainless Steel Characteristics (see page A26)

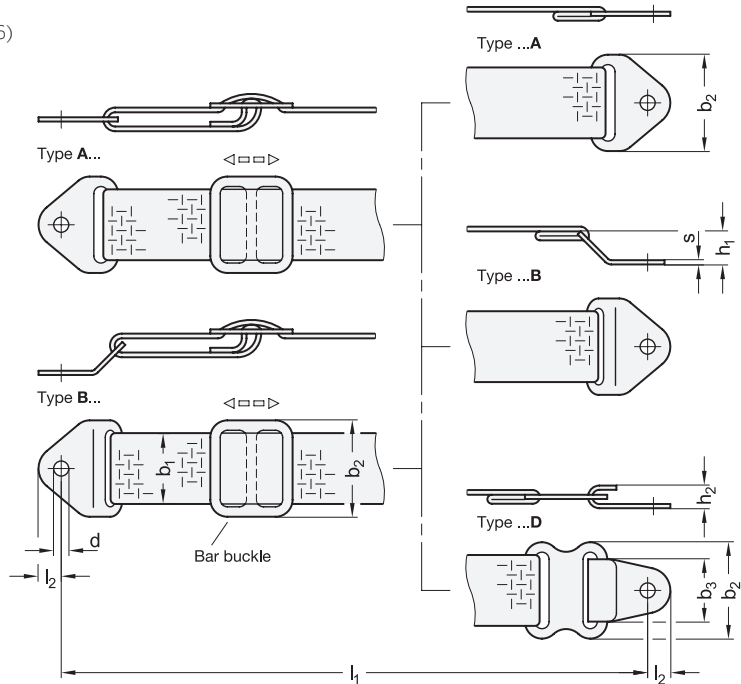

GN 1113-AA

STAINLESS STEEL

Description	b ₁	l ₁ ≈ min.	l ₁ ≈ max.	b ₂	d	l ₂	s	⚖
GN 1113-25-250-AA-NI-B	25	250	410	34	5.3	8	1.5	26
GN 1113-25-400-AA-NI-B	25	400	710	34	5.3	8	1.5	30
GN 1113-25-600-AA-NI-B	25	600	1110	34	5.3	8	1.5	34

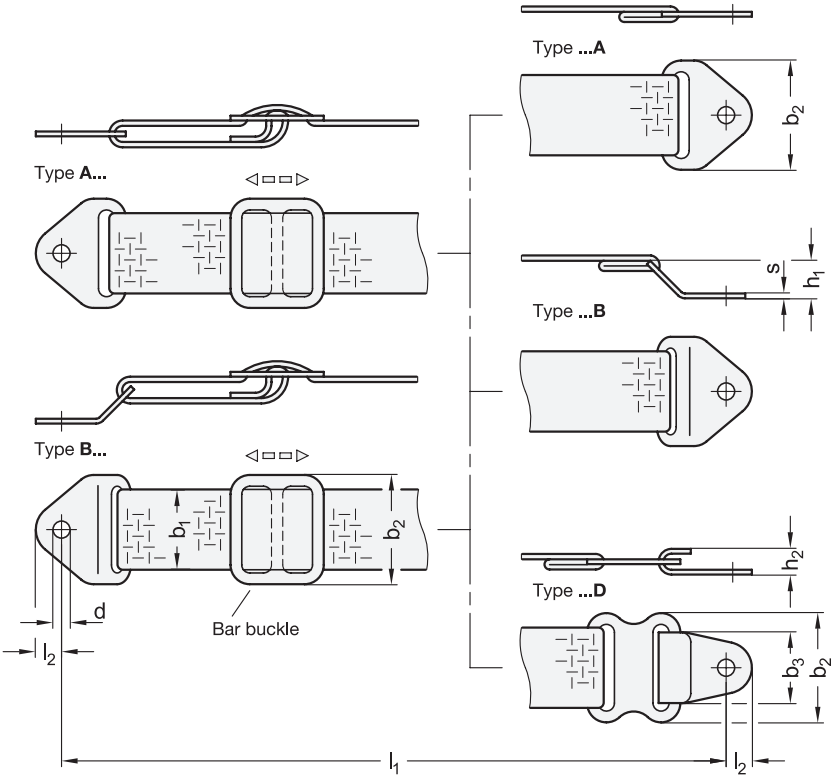

GN 1113-AD

STAINLESS STEEL

Description	b_1	$l_1 \approx$ min.	$l_1 \approx$ max.	b_2	b_3	d	h_2	l_2	s	
GN 1113-25-250-AD-NI-B	25	250	410	34	22	5.3	8	8	1.5	36
GN 1113-25-400-AD-NI-B	25	400	710	34	22	5.3	8	8	1.5	40
GN 1113-25-600-AD-NI-B	25	600	1110	34	22	5.3	8	8	1.5	44

GN 1113-BB

STAINLESS STEEL

Description	b_1	$l_1 \approx$ min.	$l_1 \approx$ max.	b_2	d	h_1	l_2	s	
GN 1113-25-250-BB-NI-B	25	250	410	34	5.3	11.7	8	1.5	30
GN 1113-25-400-BB-NI-B	25	400	710	34	5.3	11.7	8	1.5	34
GN 1113-25-600-BB-NI-B	25	600	1110	34	5.3	11.7	8	1.5	38

GN 1113-BD

STAINLESS STEEL

Description	b_1	$l_1 \approx$ min.	$l_1 \approx$ max.	b_2	b_3	d	h_2	l_2	s	
GN 1113-25-250-BD-NI-B	25	250	410	34	22	5.3	8	8	1.5	38
GN 1113-25-400-BD-NI-B	25	400	710	34	22	5.3	8	8	1.5	42
GN 1113-25-600-BD-NI-B	25	600	1110	34	22	5.3	8	8	1.5	46

